



EECS Electricity Domain Protocol

**for
FRANCE**

Prepared by Powernext SA

Based on EECS Rules Release 7 v5

Release 2 – January 2017



EECS Domain Protocol

Document Control

Version	Date	Originator	Reviewers
1	08/05/13	Powernext	C Pooley, R van Stein Callenfels
2	19/08/16	Powernext	K Verwimp, R van Stein Callenfels

Version	Approver	Date	Responsibility

Change History

Version	Description
1	First Domain Protocol
2	Update after Decree 2016-944 of 11 July 2016



Contents

A	Introduction	5
B	General	5
B.1	Scope	5
B.2	Status and Interpretation	5
B.3	Roles and Responsibilities	6
C	Overview of National Legal and Regulatory Framework	7
C.1	The EECS Framework	7
C.2	National Electricity Source Disclosure	8
C.3	National Public Support Schemes.....	9
C.4	EECS Product Rules	9
C.5	Local Deviations from the EECS Rules	9
D	Registration.....	10
D.1	Registration of an Account Holder	10
D.2	Resignation of an Account Holder	11
D.3	Registration of a Production Device.....	11
D.4	De-Registration of a Production Device.....	14
D.5	Maintenance of Production Device Registration Data	14
D.6	Audit of Registered Production Devices	15
D.7	Registration Error/Exception Handling.....	16
E	Certificate Systems Administration	18
E.1	Issuing EECS Certificates	18
E.2	Processes.....	19
E.3	Measurement	21
E.4	Energy Storage (Including Pumped Storage)	21
E.5	Combustion Fuels (e.g. Biomass)	21
E.6	Cogeneration Production Devices.....	22
E.7	Format.....	23
E.8	Transferring EECS Certificates	23
E.9	Administration of Malfunctions, Corrections and Errors.....	24
E.10	End of Life of EECS Certificates – Cancellation	25
E.11	End of Life of EECS Certificates – Expiry.....	26
E.12	End of Life of EECS Certificates – Withdrawal	26
F	Activity Reporting	27
F.1	Public Reports	27
F.2	Record Retention	27
F.3	Orderly Market Reporting.....	27



EECS Domain Protocol

G	Association of Issuing Bodies	28
G.1	Membership.....	28
G.2	Complaints to the AIB	28
H	Change Control.....	28
H.1	Complaints to Powernext	28
H.2	Disputes	28
H.3	Change Requests	28
	Annex 1: Contacts List	30
	Annex 2: Account Application/Amendment Form	31
	Annex 3: Device Registration Form	32
	Annex 4: Production/Consumption Declaration	33
	Annex 5: Cancellation Statement.....	34
	Annex 6: Definitions	36



A Introduction

The framework specified in the EECS Rules and the detailed procedures and conditions specified in this Domain Protocol have the main objective of ensuring robustness and transparency in the facilitation of EECS Schemes for all EECS Participants.

A Domain Protocol promotes quality and clarity, as it:

- makes local rules transparent;
- provides clear information to all stakeholders (consumers, market parties, other members, government, the EU Commission etc.);
- facilitates assessment of compliance and permissible variance from the EECS Rules;
- facilitates audit; and
- translates local rules into a single format and language, supporting each of the above.

Important contact information is provided in Annex 1.

The objective is to ensure an acceptable level of robustness and transparency in the facilitation of the EECS Electricity Scheme for all Scheme Participants.

B General

B.1 Scope

B.1.1. This Domain Protocol sets out the procedures, rights and obligations, which apply to the Domain of France (metropolitan and overseas) and relate to the EECS Electricity Scheme as defined in the EECS Rules.

B.1.2. Production Device qualification for this Domain will be determined by connection to the electricity system of France (metropolitan and overseas) such that, in electrical terms, the Production Device is effectively located in France.

B.1.3. Powernext is authorised to Issue EECS Certificates relating to the following EECS Product(s): EECS-GO, including EECS-GO-RES and EECS-GO-CHP, ICS.

Powernext SA has been appointed as Authorised Issuing Body and Competent Body by a decree of the French Ministry of Ecology, Sustainable Development and Energy dated December 19th 2012 and published on January 15th 2013 to act as Issuing Body for EECS-GO. This designation enters into force on May 1st 2013 and shall be valid for five years thereafter. As such it registers Production Devices, issues, transfers and cancels EECS-GO.

Powernext also acts as Registry Operator. As such, it administrates the operation of the EECS Registry within France. The Registry technical and operational support is exercised by Powernext.

B.2 Status and Interpretation

B.2.1. The EECS Rules are subsidiary and supplementary to national legislation.

B.2.2. The EECS Rules and its subsidiary documents are implemented in France in the manner described in this Domain Protocol. Any deviations from the provisions of the EECS Rules that may have material effect are set out in section C.5 of this document. The capitalised



EECS Domain Protocol

terms used in this Domain Protocol shall have the meanings ascribed to them in the EECS Rules except as stated in section C.5 of this document.

B.2.3. This Domain Protocol is made contractually binding between an EECS Participant and Powernext by agreement in the form of the Standard Terms and Conditions.

B.2.4. In the event of a dispute, the approved English version of this Domain Protocol will take precedence over a local language version.

B.3 Roles and Responsibilities

B.3.1. The Authorised Issuing Body for EECS-GO in France is Powernext. Its role is to administer the EECS Registration Database and its interface with the AIB Communications Hub.

As Authorised Issuing Body, Powernext is the Production Registrar that registers the Production Devices and as such, carries out a systematic verification of each Production Device registered. In this role, it is entitled to request assistance from the Measurement Bodies, who are the relevant Transmission or Distribution System Operators, for the verification of Production Devices. According to Article R314-69 of the Energy Code, the relevant Transmission or Distribution System Operator is obliged to answer such verification request from Powernext in due time.

B.3.2. The Competent Authority for EECS-GO in France is the French Energy Ministry. Its role is defined by legislation to be responsible for the operation of for EECS-GO in France.

B.3.3. The Authorised Measurement Body are listed hereunder:

- RTE (Réseau de Transport d'Electricité)
- ERDF (Electricité Réseau Distribution de France)
- List of Local Distribution Companies (Entreprises locales de distribution en France – ELD) available on the following website : <http://www.repertoire-eld.com/accueil.asp>.

They are the bodies established under national regulation to be responsible for the collection and validation of measured volumes of energy used in national financial settlement processes.

B.3.4. Contact details for the principal roles and Issuing Body agents are given in Annex 1.

B.3.5. The EECS Registration Database operated by Powernext can be accessed via the website <http://www.powernext.com>. Also, the Registry can be accessed via the website <https://go.powernext.com>.

The software and database used for the Powernext registry was built and is being maintained in-house and uses SQL server technology.

B.3.6. The following are valid EECS Product: Independent Criteria Scheme combinations which can be Issued under this Domain Protocol:

EECS Product	Independent Criteria Scheme
EECS - GO	
EECS – GO	ICS:TUVSUDGENEE (TÜV SÜD Industrie Service GmbH)
EECS – GO	ICS:NATUREMADE (Naturemade)



C Overview of National Legal and Regulatory Framework

C.1 The EECS Framework

C.1.1. For France, the relevant local enabling legislation is as follows:

- The relevant EU legislation is Directive n°2009-28/EC of April 23rd 2009 on the promotion of the use of energy from renewable sources.
- This EU Directive has been implemented into French law by Ordonnance n°2011-1105 of September 14th 2011. This Ordonnance introduces new articles in the Energy Code.
- The mechanism of Guaranties of Origin in France for renewable energy and cogeneration is implemented in the law by the article R314 of the French Energy Code. It specifies the obligation and powers of the entity in charge of issuing, transferring and cancelling GOs. It also details how the French GO mechanism is functioning.
- Disclosure rules and obligation are implemented in the law by the article R333 of the French Energy Code modified by the Decree n°2016-944 of July 11th 2016.
- French Energy Code is available on this website: <https://www.legifrance.gouv.fr/affichCode.do?cidTexte=LEGITEXT000023983208&dateTexte=20111114>.

The main items are the following:

- According to Article L314-16 of the French Energy Code, only GOs can certify the origin of the electricity produced from renewable sources in order to prove to final consumers that subscribed to a green offer the quantity of energy produced from renewable sources.
- Guarantees of Origin are issued for net production on a monthly basis. Guarantees of Origin may be issued within 5 months from the end of the related production period and expire after 12 months after the end of the related production period.
- Article R314-67 details the GO recognition from other European countries. Unless Powernext has well-founded doubts about the accuracy, reliability or veracity of GOs from another European Country, then Powernext notifies the French Ministry. The French Ministry then decides whether or not to accept GOs from this country.
- The article R314-66 specifies that to prove the origin of electricity consumed in respect of a calendar year, GOs must be used before the 31st March of the following year.

The Energy Code is completed by an Arrêté:

- Arrêté of November 8th 2007, provides rules relating to the production that can be certified as energy produced from renewable sources and CHP sources.



EECS Domain Protocol

C.1.2. Powernext has been properly appointed as an Authorised Issuing Body for EECS-GO under Arrêté of December 19th 2012, published on January 15th 2013 which designates Powernext as the Competent Body for issuing, transferring and cancelling GOs.

C.2 National Electricity Source Disclosure

C.2.1. Legislation and regulation:

Article R333-10 of the French Energy Code modified by the Decree n°2016-944 of July 11th 2016, describes the obligation for suppliers to disclose information to the final consumer regarding the electricity supplied. Suppliers have to indicate on their bill (or an attached document) and on any promotional document the share of the different primary energy sources that have been used to produce the electricity sold. Suppliers also have to indicate information on the quantity of carbon dioxide emissions and/or radioactive waste per kWh produced from these primary energy sources. The French residual mix published by Powernext must be used by the supplier insofar as his supplier mix consists of untracked electricity.

GOs are the only accepted tracking mechanism that is recognised with regard to electricity from renewable sources. According to Article L314-16 of the French Energy Code, only GOs can certify the origin of the electricity produced from renewable sources in order to prove to final consumers that subscribed to a green offer the quantity of energy produced from renewable sources. For consumption of year N, GOs must be cancelled before 31st March of year N+1.

Article R333-14 of the French Energy Code modified by the Decree n°2016-944 of July 11th 2016, notifies that Powernext is in charge of the disclosure of the French residual mix. It is published before June 15th of the following calendar year. The calculation method is in line with the method used by the AIB, in that manner, it prevents double counting of renewable energy sources.

Article R333-15 of the French Energy Code modified by the Decree n°2016-944 of July 11th 2016, describes the obligation for suppliers to report to the French Ministry of Energy their supplier mix before December 31st of the following calendar year. Agents from the Ministry have the power to enquire in order to verify disclosed data.

The same regulation applies to overseas territories (DOM-TOM). The only exception is that one residual mix is calculated per territory (see C.3.2.).

C.2.2. Summary of the disclosure methodology and process:

For all their green offers, suppliers have the obligation to use guarantees of origin to certify the renewable origin of the energy sold. The quantity of guarantees used over a certain period must be at least equal to the quantity of green energy sold. Furthermore, suppliers can use additional guarantees in order to increase the renewable share in their supplier mix.

The regulation requires suppliers to inform the consumer of the origin for the electricity provided. For standard offers, the residual mix is used as a basis for the calculation of the supplier mix for untracked electricity.



EECS Domain Protocol

C.2.3. Residual Mix:

A residual mix is required to be calculated by the Registry Operator. The methodology of calculation is based on the Transaction based European Standard. The residual mix is published by the Registry Operator before the 15th of June of the following year. It is published on the following website: www.powernext.com.

Overseas are not taken into account in the metropolitan residual mix.

In case of GOs transactions in one of these territories, a residual mix would also be calculated for this territory. In the meantime, the residual mix for each overseas territory is equal to the production mix of the same territory.

C.3 National Public Support Schemes

In France, different types of support schemes are in place.

- Production supports

France introduced a feed-in tariff mechanism to support renewable energy through the application of article 10 of Law n°2000-108 of 10th February 2000. Some French renewable energy producers (running wind farms, photovoltaic and other types of production devices depending on their size) are guaranteed regulated feed-in tariff for their output, regardless market price. A few defined market participants are obliged to buy this electricity at this feed-in price and are then reimbursed by the French state. Regulated feed-in tariffs depend on the type of production devices concerned and are published by arrêté that are revised periodically. Details on this mechanism can be found on the ministry website (in French): <http://www.developpement-durable.gouv.fr/Les-tarifs-d-achat-de-l-1,12195.html>. Producers selling their renewable output under this scheme cannot apply for the issuance of guarantees of origin for this output; only obligated buyers can do so. Production supports on a specific production device are systematically indicated on each EECS-GO of this production device, along with their duration and amount in euro.

France introduced a feed-in premium mechanism through the application of Decree n°2016-682 of 27th May 2016. Producers selling their renewable output under this scheme cannot apply for the issuance of guarantees of origin for this output. The amount of green electricity produced under this scheme will be counted in the residual mix.

- Investment supports

There exist various investment support schemes in France at national level or regional level. Investment supports on a specific production device have to be indicated on each EECS-GO of this production device, along with the amount received.

C.4 EECS Product Rules

C.4.1. The EECS Product Rules as applied in France are set out within sections D and E of this document.

C.5 Local Deviations from the EECS Rules

French legislation differs from the EECS Rules on the following points:

- A Registrant may request Powernext to issue Guarantees of Origin. Such request must be submitted to Powernext no later than five months after the end of the production

period. A Registrant cannot request the issuance of GOs for production periods exceeding one calendar month, unless the Output of a Production Device during a calendar month is less than one MWh. In that case, such Output may be carried forward for a period of up to five months until the lower limit of one MWh is reached, and the production period in the request may be extended accordingly.

- Powernext shall issue a number of Guarantees of Origin equal to the amount of electricity produced during the production period to which the request relates, rounding down to whole MWh. Any remaining amounts of electricity shall not be carried forward.
- According to Decree of 8th November 2007, the production of renewable electricity from a pumped storage hydro power plant fed by natural inflow as well as by pumping that can be subject to EECS-GO issuance is equal to the total electricity production from the Production Device, minus energy consumed in pumping, assuming a normative yield of 70% for pumped energy
- According to Decree of 8th November 2007, the production of energy from a municipal waste incineration plant that can be subject to EECS-GO issuance is equal to 50% of the total electricity production from the Production Device.
- According to Decree of 8th November 2007, EECS-GO can be delivered to combined Production Devices producing electricity both from biomass and combustion fuels other than those mentioned in the paragraph above, only if their fraction of non-renewable energy is less than 15% of the primary energy it consumes on a yearly average. If such is the case, then the part of electricity that is renewable and can be subject to EECS-GO issuance is equal to 85% of the whole electricity produced by the Production Device.
- The Powernext Registry handles EECS-GO and EECS-GO certificates with an additional ICS label that can be used in France, according to the French legislation. Powernext does not accept Non-Governmental Certificates.

D Registration

D.1 Registration of an Account Holder

D.1.1. Applications

- Any legal person who is not a member of the Association of Issuing Bodies or such member's affiliate or agent can be a participant of the EECS Scheme.
- An application to become an Account Holder is done by connecting to the public website of the Issuing Body in the "registration" section in order to obtain the registration forms (such request can also be done by phone or by regular mail).
- Powernext sends the applicant the documentation that must be filled in order to become an Account Holder. These documents must be completed and signed by the applicant and sent back to Powernext. They include :
 - The Standard Terms and Conditions; (2 copies)
 - The admission form, including a specific questionnaire on the future activity of the Account holder on the registry; (1 copy)
 - Identification information about the applicant (registered office address and VAT number);
 - A list of the senior managers and other representatives with the power to sign all of the documents relating to the operation of the registry (authorised signatories)



EECS Domain Protocol

- A copy of the annual report, company registration, articles of association and the senior managers' powers, prepared in accordance with the legislation of the applicant's home country.
- The completeness and the adequacy of the documents sent back to Pownext by the applicant are then checked by the market operations and market surveillance team of Pownext, which assess whether the applicant can be accepted. Moreover:
 - As the case may be, additional documentation may be required from the applicant;
 - Depending on the analysis of the company, a "risk profile" will be attached to it. If a company raises awareness, a specific attention will be paid to its actions on the registry;
 - In case the market surveillance team has serious doubts regarding the applicant company, it can alert the competent authorities (Ministry or else).
- When the assessment of the application is completed by Pownext and the application has been accepted, Pownext signs the Standard Terms and Conditions and sends its copy back to the applicant who then becomes an Account Holder.
- Along with the Standard terms and Conditions, Pownext sends the Account Holder the physical ID keys together with the login and password which will be used to connect to the secure part of the website. For security reasons, the login and password are sent separately.
- Pownext will answer any application request as quickly as possible. It should take place within one month after receipt of the complete necessary data for application.
- Tariff of services can be found on the Pownext website: <http://www.pownext.com>

D.1.2. Maintenance of standing data

An Account Holder must notify Pownext without any delay of any upcoming changes that will result, or unplanned changes that have resulted, in the information recorded in the EECS registry in relation to the Account Holder becoming inaccurate. The Account Holder himself is responsible for keeping the Account Holder information recorded in the EECS registry accurate. This can be done by logging onto the Registry and only by an accredited user of the Account Holder. Moreover, any change done this way will ultimately be validated by Pownext.

D.2 Resignation of an Account Holder

In accordance with the Standard Terms and Conditions, the Account Holder must notify Pownext of its intent to close its Account in written form. Such request shall be effective one (1) month after receipt by Pownext.


Once an account closed, the account holder has no longer access to the registry. Any EECS-GOs remaining in the Account of the EECS registry at the time of locking will remain there until being expired.

Outstanding charges are still due according to the invoices received.

D.3 Registration of a Production Device

D.3.1. Processes:

In order to issue EECS-GOs, the Account Holder must register production devices according to the process described in the chart hereunder and described in the following paragraphs.

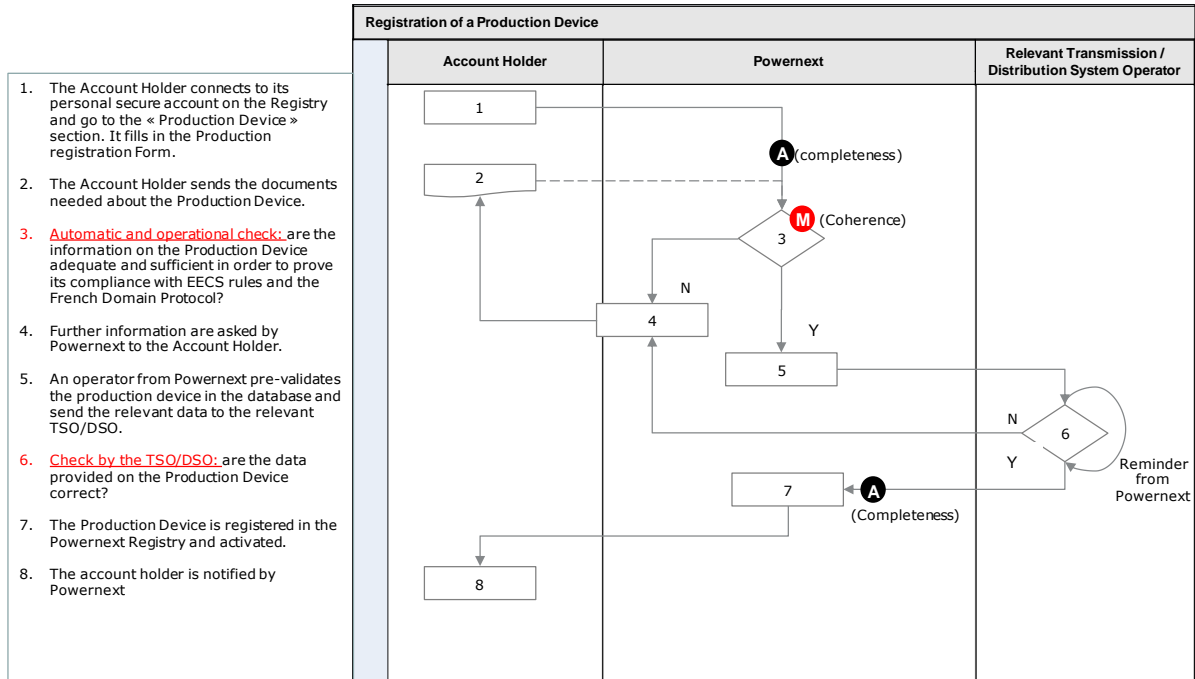

D.3.2. A| A: Automatic check of completeness, but the process is manual for the Account Holder/TSO

M: The coherence of the information is manually checked by Powernext

10

the Production Device

Qualification Criteria for EECS-GO and the French relevant legislation. To be qualified, Production Devices must:

- be located in France (metropolitan or overseas),
 - be capable of producing electricity using renewable energy sources or cogeneration,
 - and be equipped with an electricity-metering device capable of measuring the electricity produced.
- Only the owner of a Production Device, a company duly authorised by the owner of a Production Device, or an obligated energy purchaser identified in the French feed-in tariffs scheme (as defined in article L. 121-27, L. 311-12 et L. 314-1 of the French “code de l’énergie”) may register a Production Device, which is located in France in the EECS registry. A producer owner of a production device that satisfies the criteria in the paragraph above and which produces electricity sold to obligated energy purchasers at the French feed-in tariff price cannot register its production device in order to issue guarantees of origin; only the obligated purchaser can do so.

In order to register a production device, the following procedure applies:

- The Account Holder must connect on its personal secure account on the Registry and go to the “Production Devices” section.
- The Account Holder must fill in the Production Device electronic registration form (see Annex 3) and send the documentation requested about the Production Device, in accordance with the Production Device Qualification Criteria for EECS-GO and the French relevant legislation. This documentation

comprises the information hereunder. This list might evolve depending on Production Device Qualification Criteria for EECS-GO and the French relevant legislation possible evolutions.

- Production device: name, address/location, start date, commissioning date, installed capacity, the types of support (investment and/or production support, as appropriate), owner, Account Holder, transmission or distribution system operator on which the Production Device is connected, applied EECS Schemes, references of the exploitation authorization, references of the grid access contract,
 - Codes of all possible fuels which can be converted into electricity by the Production Device according to the fuel codes in AIB EECS fact Sheet,
 - Technology code of the Production Device according to technology codes in AIB EECS Fact Sheet 5,
 - Specification whether the Production Device is eligible for any kind of support scheme (including investment support and feed-in tariffs), corresponding amount and period of the support scheme. In case of feed-in tariffs, reference to the purchasing obligation contract,
 - Additional fields can be required for specific Production Devices such as cogeneration devices.
- The attention of the Account Holders is drawn to the fact that some of the required information on the Production Device will not appear on the EECS-GO. In some cases (e.g. the reference of the declaration of connection of the production device to the grid or the amount and duration of support schemes), the data will be indicated on the French EECS-GO but might be lost when the EECS-GO is exported.
 - An automatic check is carried out in order to ascertain whether the forms have been correctly filled in.
 - Operators from Powernext will then check whether the information given by the Account Holder is in the right format and coherent.
 - If the information given to Powernext is adequate, data are sent to the relevant Transmission or Distribution System Operator in order for it to check them subject to the conditions of the contract signed with each of them.
 - The relevant Transmission or Distribution System Operator checks the data required based on the information it possesses on the Production Device and sends the outcome of this check to Powernext.
 - If the check is positive, the Account Holder is notified when its Production Device is activated. A unique number is associated with the production device, according to the AIB numbering. If the check is negative, Powernext notifies the Account Holder and the Production Device is not activated.
 - A Production Device is registered for three years.
 - In case the Account Holder or its affiliate is not the owner or the sole owner of the Production Device, it must include in the application
 - Either a power(s) of attorney signed by the (other) owner(s) of the Production Device,
 - Or the Contract of Purchasing Obligation that links the producer and the Account Holder.
 - Metering data of each Production Device are sent as described in E.2.
 - Tariffs for registering a Production Device are disclosed on the Powernext website www.powernext.com.



EECS Domain Protocol

D.3.3. Production devices located on border between domains

For plants being located on border with other domains, Powernext will notify the Competent Body for EECS-GO in the respective domain in order to agree on the possibilities to register the Production Device. Such agreement shall particularly ensure that double issuing of EECS-GO is excluded.

D.4 De-Registration of a Production Device

The Registrant must notify Powernext in the GO registry of its intention to unregister a Production Device via written form. The applicant must warn Powernext at least 15 business days in advance of its intention of de-registering a production device. Powernext will answer the request by deactivating the production device in the shortest delay and at maximum in a one-month period of time.

Re-registration requirements are similar to the registration requirements described in D.3.2. Outstanding charges are still due according to the invoices received.

D.5 Maintenance of Production Device Registration Data

D.5.1. The Registrant of a Production Device must notify Powernext of any upcoming planned changes that will result, or unplanned changes that have resulted, in:

- the information recorded in the EECS registry in relation to the Production Device becoming inaccurate; or
- the Qualification Criteria for the EECS Product ceasing to be satisfied with respect to that Production Device.

The Registrant notifies Powernext of such changes by making the necessary amendments to Production Device information in the EECS registry.

On receipt of a change of details notification (following an inspection or otherwise), Powernext will evaluate the impact of the changes on the Production Device Qualifying Criteria and respond to the Registrant within sixty (60) days specifying the decision taken. Powernext may respond to the changes by approving or disapproving them in the EECS registry, or by requiring verification by the relevant Transmission or Distribution System Operator. If Powernext does approve the change, the production device is modified with an “effective date” associated to the change. Certificates issued after the “effective date” will contain the new characteristics of the production device.

When Powernext becomes aware that a Production Device no longer fulfils, or will no longer fulfil, the Production Device Qualification Criteria, the EECS registry record for that Production Device will be updated to show that the Production Device no longer qualifies for EECS-GO Product Certificates with effect from:

- the date on which such planned changes are due to come into effect, when such change has been planned and notified in advance; or
- as soon as reasonably practicable after becoming so aware, in case of other changes.

D.5.2. The registration of a Production Device expires after three years. The Registrant must confirm the re-registration of the Production Device before expiry.

D.6 Audit of Registered Production Devices

D.6.1. Re-registration of the Production Device every 3 years

Pursuant to article R314-69 of the Energy Code, Powernext shall verify the accuracy of the data given in the requests for issuance that it has received with the support of Transmission System Operators and Distribution System Operators if needed.

When re-registering a Production Device, Powernext will verify together with the Account Holder that the data on the Production Device have not changed. In case a change is reported, the relevant Grid Operator will be contacted.

D.6.2. Regular check of the Production Devices with the Transmission and Distribution System Operators

At the regular meetings between Powernext and the Grid Operators who check the reliability of the Production Device data and the Issuance data, a systematic check is done to verify the validity of the data registered on the Production Devices. In case of a change, the procedure described in D.5.1. will apply.

D.6.3. On-site audits are performed to a sample of production devices by Powernext

Registered Production Devices which have been used for requests or procurement of EECS-GOs can be subject to on-site audits within the three years following their registration in the database of the Registry.

This process is distinctive as it is mostly managed outside the software tool and implicates both functional operators and auditors.

The process described hereunder targets the cases where the auditor:

- belongs to the Powernext employees authorized by regional prefects for this task or
- is a subcontractor chosen by Powernext and whose employees have been authorized by regional prefects for this task.

Audits are carried out according to a procedure, methods and evaluation criteria which are transparent and in conformity with Article R314-68 of the Energy Code. This process is described hereunder:

- A notification is sent to the Account Holder (and to the owner of the Production Device if the Account Holder has a power of attorney).
- The Account Holder (and the owner of the Production Device if applicable) answer on its availability.
- The audit is carried out by the agent who verifies the accuracy of the data communicated to the Registry. A specific attention is drawn to the Production Device Diagram, the place of the Meters and the calculation of the net energy certified.
- The result of the audit is communicated to the operational team of the Registry.
- If the result of the audit is positive, the operator indicates that the Production Device has been audited and is in conformity with the registration. The Account Holder is notified of this.
- A report stating the date, location and nature of the observations made and testifying of the conformity with the declaration made on the Registry is sent to the Account Holder and to the regional prefect.
 - If the result of the audit is negative, the operator indicates on the Registry interface that the Production Device has been audited and is not compliant. The Account Holder is notified of this and the Production Device is deactivated.



EECS Domain Protocol

If it appears that EECS-GOs were inaccurately issued as a result of this error, then the procedure described in E.9 may apply.

- A report stating the date, location and nature of the observations made and testifying of the non-conformity with the declaration made on the Registry is sent to the Account Holder and to the regional prefect.
- After deactivation of the Production Device, the Account Holder cannot request issuance of EECS-GOs for this Production Device.
- In order for the Production Device to be reactivated, the Account Holder will have to ask for an additional audit, which will be invoiced to it.
- The Production Device will be reactivated only if the new audit is positive.

All the Production Devices registered can be subject to on-site audits. Peculiar attention will be paid to the Production Devices whose EECS-GO's issuance follows particular rules such as, for instance, pumped storage hydro power plants, biomass production devices, cogeneration devices, production devices combining both renewable and non-renewable sources.

For on-site audits of Production Devices carried out in accordance with Article R314-68 of the Energy Code, the Production auditors can either be employees from Powernext authorized by regional prefects or subcontractors appointed by Powernext whose employees have been authorized by regional prefects. For consumption declaration approvals in case of biomass "combined" production devices and cogeneration plants, Production Auditors must be independent from the owner of the production device and need to be accredited by Powernext; they do not however need to be authorized by regional prefects. The process of accreditation is the following: the legal entity (or the person) wanting to become a Production Auditor needs to apply for such a role, by sending to Powernext a formal letter along with its credentials. On the basis of this application, Powernext will decide whether or not to approve such applicant. The answer will be given within two months following the receipt of the letter by Powernext.

From its date of registration, and during the three years following this registration, the Production Device can be audited on-site by authorized agents.

D.6.4. Account Holders and owners of Production Devices agree to grant access to Powernext agents for on-site audits. Refusal to permit access shall be considered a breach of the Standard Terms and Conditions.

D.6.5. If an inspection identifies material differences from the details recorded on the EECS Registration Database, the Registrant must re-apply for registration of the Production Device.

D.7 Registration Error/Exception Handling

D.7.1. Any errors in EECS Certificates resulting from an error in the registered data of a Production Device will be handled in accordance with section E.9.

D.7.2. Error handling

If Powernext detects errors in the Account Holder information, it will notify the Account Holder in order to ensure that the error is rectified by the Account Holder. If expressly authorised by the Account Holder, Powernext may rectify the error itself.

If Powernext detects an error in the information of a Production Device in the EECS Registry, the following procedure is applied:

- If the error is minor and that the Production Device is still eligible for EECS-GOs issuance, then Powernext will notify the Account Holder in order to ensure



EECS Domain Protocol

that the error is rectified by the Account Holder. If expressly authorised by the Account Holder, Pownext may rectify the error itself;

- If the error means that the Production Device ceases to be eligible for EECS-GOs issuance, then the Production Device is deactivated. For the Production Device to be reactivated, the Account Holder will have to ask for an onsite audit, as described in Section D.6, which will be invoiced to it. If it appears that EECS-GOs were inaccurately issued as a result of this error, then the procedure described in E.9 may apply.
- When appropriate, Pownext will report to the AIB in respect of the Section F.3.2.



E Certificate Systems Administration

E.1 Issuing EECS Certificates

EECS-GOs can be issued:


- in respect of the qualifying energy output of such a Production Device during any period in which it was registered in the Powernext registry for the purpose of the EECS-GO Scheme; and
- for a production period of 1 month, it can be of a longer period in case of very small plants if the monthly production is fewer than 1MWh. Even in that case, they can never exceed 5months;and
- when the issuing request for a specific production was submitted not later than 5 months after end of the production period; and
- to an Account Holder who does not have any outstanding fees payable to Powernext in conjunction with EECS-GOs; and
- Each unit of qualifying energy output can only be certified once for electricity disclosure.

One EECS-GO is issued for each whole one MWh of qualifying net energy of the Production Device.

The EECS-GOs shall be issued in such format as may be determined by AIB from time to time and including the details in accordance to the relevant French law and the AIB standards.

E.2 Processes

Issuance of EECS-GOs is done according to the process described in the chart and in the paragraphs hereunder.

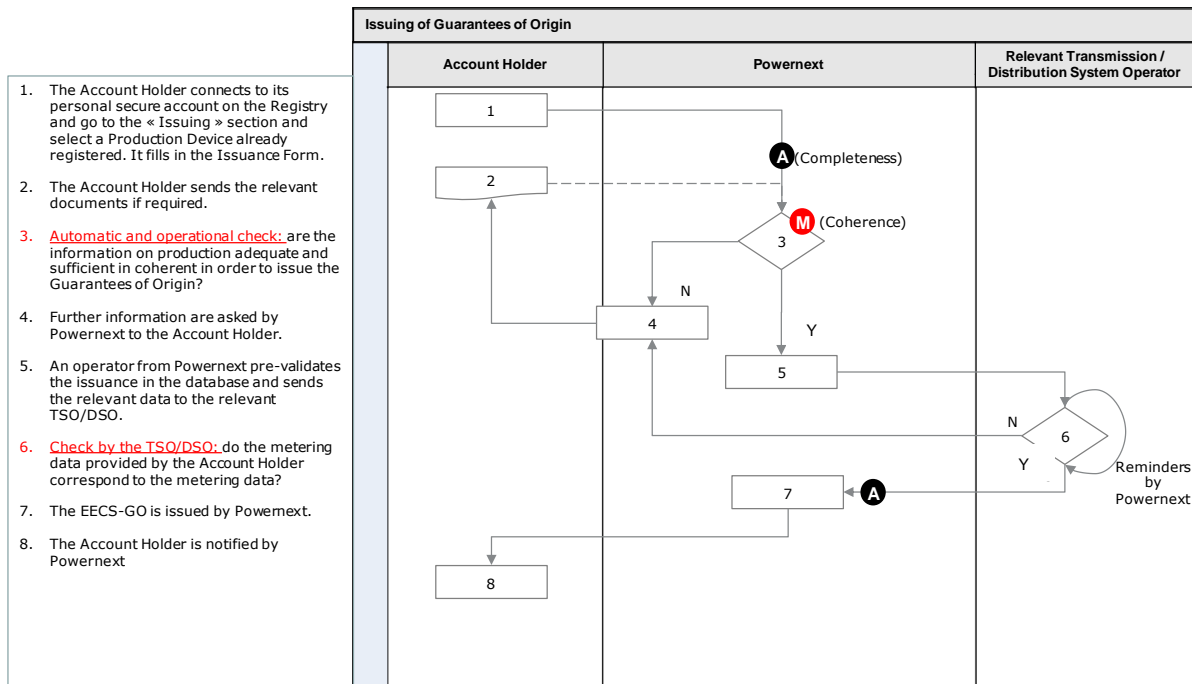

A: Automatic check of completeness, but the process is manual for the Account Holder/TSO

M: The coherence of the information is manually checked by Powernext

- Once a Production Device has been registered and activated, the Account Holder to which the Production Device relates can request the issuance of EECS-GOs for electricity production starting at the latest of the following date:
 - when the Production Device has been commissioned or
 - If applicable, when the Production Device has been transferred to a new Account Holder (either as owner or as beneficiary of a power of attorney) or
 - if applicable, when the Production Device has left or entered the feed-in tariffs mechanism (purchasing obligation system).
 - 5 months before the date of the issuing request in respect with the section E.1.
- In order to obtain this issuance, the Account Holder connects to its personal secure account on the Registry in the “issuance” section. It is then requested to fill in an electronic form with the relevant information for such issuance:
 - Start date and end date of the production period: this period shall coincide with measurement data (in general, periods should be one month or a multiple of a month; except in specific cases such as the first GO issued from the Production Device concerned)
 - Net production of renewable electricity injected to the grid for the relevant period. For energy storage Production Devices, for production devices using combustion fuels and for cogeneration, net renewable

electricity produced should respectively be considered such as described in E.4, E.5 and E.6. Net production means the electricity produced by the Production Device excluding consumption of auxiliary devices of the Production Device or any production which cannot be subject to EECS-GOs. The amount of the production concerned shall coincide with measurement data from the Transmission or Distribution System Operator. These data will be checked by the relevant Transmission or Distribution System Operator.

- Additional fields can be required for specific Production Devices such as cogeneration devices.
- An automatic check is carried out by Powernext in order to ascertain whether the initial information given by the applicant at this stage is sufficient and adequate, including
 - a first check on the amount of net production declared by the Account Holder compared to the installed capacity of the Production Device and
 - a check on the validity of the EECS-GO (dates of the issuance request according to E.1).
- The completeness and the adequacy of the documents sent to Powernext by the Account Holder are then checked by Powernext. As the case may be, the Account Holder may also be requested to send additional information. Specifically in case of cogeneration or “combined” Production Devices, additional documents are required in order to check the additional data required as mentioned in E.5 and E.6. If the outcome of this check is negative, the Account Holder is required to modify its request.
- In case the check is positive, two different processes will be implemented to have the data checked by the relevant Measurement Bodies depending on the contract signed between Powernext and the relevant Measurement Body:
 - Systematic check process:
 - The Measurement Body sends the net production data based on the metering data it possesses on the Production Device regarding this production period.
 - The EECS-GO is issued depending on the net production and the Account Holder is notified.
 - Regular check process:
 - In this case, the Account Holder is required to send the metering data corresponding to the EECS-GO to be issued. This document is checked by Powernext together with metering data provided by the Measurement Body. If the check is positive, the EECS-GO is issued and the Account Holder is notified.
 - Several times a year on a regular basis, (to be defined in the contract with the Measurement Body), data on EECS-GO issued are then reconciled by the Measurement Body.
 - The EECS-GO would then be corrected afterwards according to the methodology described in E.9 if any error was detected by the Measurement Body during one of its regular checks.
- Powernext will answer any issuing request as quickly as possible. According to Article R314-63 of the Energy Code, issuing should take place within thirty (30) days after receipt of the complete necessary data for issuance. In case of EECS-GO issuance from a new Production Device or from a Production Device connected to a Distribution System Operator, this delay is increased up to sixty (60) days.

E.3 Measurement

- The EECS GOs are awarded for the amount of electricity production from renewable resources or High Efficient Cogeneration, as described in E.2.
- Frequency of measurement:
 - For installation of less than 36kVA, Distribution System Operators send metering data to producers once every two months,
 - For installations of more than 36kVA, Distribution and Transmission System Operators send metering data on a monthly basis.
- The verification is carried out on the net production of renewable electricity injected to the grid for the relevant period. For energy storage Production Devices, for combined production devices using both combustion fuels and for cogeneration, net renewable electricity produced should respectively be considered such as described in E.4, E.5 and E.6. For any such electricity, no EECS-GOs will be issued. This must ensure that the certificates issued based on the Production Declaration can provide unique and exclusive evidence of the production of electricity from particular energy sources.
- The metering devices in place should correspond to the technical standards approved by CRE (Commission de Régulation de l'Energie) and defined by the different Transmission System Operators and Distribution System Operators in the respective documents "conditions techniques d'accès aux réseaux publics d'électricité", available on the following website <http://www.cre.fr/reseaux/reseaux-publics-d-electricite/raccordement>.
- The verification of the measurement is carried out as described in paragraph E.2.
- The registrant is responsible for the measurement data it sends to Powernext.

E.4 Energy Storage (Including Pumped Storage)

- According to Decree of 8th November 2007, the production of renewable electricity from a pumped storage hydro power plant fed by natural inflow as well as by pumping that can be subject to EECS-GO issuance is equal to the total electricity production from the Production Device, minus energy consumed in pumping, assuming a normative yield of 70% for pumped energy.
- Metering data of both the production and the pumping consumption must be sent to Powernext.

E.5 Combustion Fuels (e.g. Biomass)

- According to Decree of 8th November 2007, implementing Article R314 of the Energy Code, the production of energy from a municipal waste incineration plant that can be subject to EECS-GO issuance is equal to 50% of the total electricity production from the Production Device.
- According to Decree of 8th November 2007, implementing Article R314 of the Energy Code, EECS-GO can be delivered to combined Production Devices producing electricity both from biomass and combustion fuels other than those mentioned in the paragraph above, only if their fraction of non-renewable energy is less than 15% of the primary energy it consumes, on a yearly average. If such is the case, then the part of electricity that is renewable and can be subject to EECS-GO issuance is equal to 85% of the whole electricity produced by the Production Device. This yearly average is calculated on the basis of the previous calendar year or on the basis of the expected values for new production devices. In order to prove this data, a specific consumption declaration reviewed by a Production Auditor has to be sent to Powernext. This document has to be sent to Powernext on a yearly basis

within one month after the end of each calendar year. This document also needs to be sent when the production device is registered for the first time. The Production Auditor shall be preliminarily accredited by Powernext following the process described in D.6.3. Depending on the results of the auditor's statement and taking into account Decree of 8th November 2007, implementing Article R314 of the Energy Code, Powernext will decide whether or not to issue EECS-GO for the following calendar year. The EECS-GOs issued from such Production Devices indicate the fraction of non-renewable energy produced on the primary energy the Production Device consumes.

E.6 Cogeneration Production Devices

- The way to calculate the amount of production on which EECS-GOs can be issued is fully in line with Directive n°2012/27/EC.
- According to Decree of 8th November 2007, implementing Article R314 of the Energy Code, amongst cogeneration Production Devices, only those justifying a ratio of more than 10% of primary energy saving calculated according to Annex I and II of the here-mentioned Decree can issue guarantees of origin. According to the same Decree, a cogeneration Production Device, the installed capacity of which is below 1 MW, can be considered eligible to the issuance of guarantees of origin if their energy savings are higher than 0%, as opposed to the 10% limit set for larger devices.
- According to Decree of 8th November 2007, implementing Article R314 of the Energy Code, the production of electricity from cogeneration that can be subject to GOs is equal to:
 - the entire electricity production in case
 - the production device has a global annual yield of more than 80% and is a combined cycle gas turbine with heat recovery or a steam turbine with condensation turbine (closed cycle),
 - the production device has a global annual yield of more than 75% and is another type of cogeneration plants (according to EECS types of production devices fact sheets)
 - the quantity of heat issued from the production device multiplied by the power to heat ratio, as calculated in annex I and II of Decree of 8th November 2007, implementing Article R314 of the Energy Code.
 - In order to facilitate calculation of the number of MWh to be issued, Powernext asks the Account Holder to use the Excel file "AIB CHP-GO model" and to send it back to the market operations team of Powernext. Specific attention will be paid to those production devices, in particular for *in situ* audits.
 - In order to prove this data, a specific consumption declaration reviewed by a Production Auditor has to be sent to Powernext. This document has to be sent to Powernext on a yearly basis within one month after the end of each calendar year. This document also needs to be sent when the production device is registered for the first time. The Production Auditor shall be preliminarily accredited by Powernext following the process described in D.6.3. Depending on the results of the auditor's statement and taking into account Decree of 8th November 2007, implementing Article R314 of the Energy Code, Powernext will decide whether or not to issue EECS-GO for the following calendar year and how many.
 - According to Article R314-61 of the Energy Code, additional information are needed for the issuance of GOs for high-efficient cogeneration:
 - The thermal capacity of the production device
 - The lower calorific value of fuel used



EECS Domain Protocol

- The efficiency of the production device
- The quantity of heat produced together with the electricity during the production period
- The use of heat
- The primary energy saved expressed as a percentage according to Annex II of the Directive n°2012/27/EC

The information previously mentioned will be included on guarantees issued for high-efficient cogeneration.

E.7 Format

E.7.1. EECS Certificates shall be Issued in such format as may be determined by AIB from time to time.

E.8 Transferring EECS Certificates

The Account Holder can transfer EECS-GO to another Account in the same EECS-registry or to another EECS registry for EECS-GO in another Domain through the registry website.

Only persons duly authorized by the Account Holder may request the transfer of EECS-GO out of that Account Holder's Transferable Account.

Only EECS-GO can be transferred from and to the Pownext Registry. This excludes the transfer of cancelled or expired EECS-GO. In particular, only EECS-GO still valid according to French law can be imported in the Pownext Registry. EECS-GO with additional label (ICS products) can also be transferred from and to the Pownext Registry. Only RES EECS-GO and CHP EECS-GO can be imported to and exported from the Pownext registry.

E.8.1. The initiation of transfers is made by the selling Account Holder.

E.8.2. The transfer of EECS-GO and the confirmation of that transfer are done in accordance with the following procedure:

- The selling Account Holder connects to its personal secure account on the Registry and goes to the "Transfer" section. It is then requested to indicate the beneficiary Account Holder of the transfer (from the Pownext registry or from another AIB registry) as well as the EECS-GO from one of its Transferable Accounts to be transferred. This excludes withdrawn, expired or already cancelled EECS-GOs that are in his cancellation account.
- An automatic check is carried out in order to ascertain whether the information given by the applicant at this stage is sufficient and adequate.
- In the case of an import, the AIB hub sends to Pownext an import request of EECS-GOs from an Account Holder in another AIB registry. This request details the EECS-GOs to be transferred to a specific Account Holder in the Pownext registry.
- The information given by the Account Holder or by the AIB hub (in the case of an import) is then automatically checked by Pownext (type of certificates allowed in the French registry). In case of an export or an import, the operator might contact the other AIB registry in which the counterpart is localized in order to be sure of the identity of the other counterpart or for any other information regarding the transfer.



EECS Domain Protocol

As the case may be, the Account Holder may also be requested to send additional information.

- If the information is complete and adequate, Pownext pre-validates the transfer: data on the EECS-GO are shown to the beneficiary who must confirm the transfer. In the case of an export, data are sent to the relevant AIB registry via the AIB hub, which may accept or refuse the export.
- If the beneficiary (or the relevant AIB registry in the case of an export) refuses the transfer, the transfer is cancelled and the EECS-GO certificates are returned to the original transferable account of the Account Holder; the selling Account Holder is notified of the rejection. If the beneficiary confirms the transfer, the EECS-GO are withdrawn from the Account of the selling Account Holder and transferred to the Account of the beneficiary. Both Account Holders are notified of the transfer of the EECS-GOs.

E.8.3. Administration of malfunctions, corrections and errors

Pownext has the right to perform corrective actions such as withdrawal or transfer of EECS-GOs in the Pownext Registry. Should Pownext notice an error in another EECS registry, it will contact the other registry in order for a solution to be found.

E.8.4. Where it is impossible to transfer for technical reasons, this can be overcome by cancelling certificates for use in another domain, with the agreement of the importing issuing body. Any such cancellations are notified to the "importing" issuing body and the AIB Secretariat.

E.9 Administration of Malfunctions, Corrections and Errors

E.9.1. Once issued, the details of an EECS Certificate cannot be altered or deleted except to correct an error.

In the event that it transpires that the data in any EECS-GOs is inaccurate (whether or not through an act or omission of the Registrant of the originating Production Device):

- Pownext shall either withdraw those Certificates (provided that such EECS-GOs are, at the time of such Withdrawal, in the Transfer Account of that Registrant) or correct this error on the following months by issuing more or less EECS-GOs from the same Production Device of the Account Holder. In case the Production Device is not active anymore, the certificates from similar Production Devices could be withdrawn ; and
- The Account Holder shall pay Pownext the cost of securing the agreement of another Account Holder to the Withdrawal of EECS-GOs of the same type from that other Account Holder's Transfer Account, so that, as far as reasonably practicable, EECS-GOs are withdrawn with an adequate volume and financial value.
- In case the Certificates are no longer in the French domain, Pownext might cooperate with other Issuing Bodies to withdraw the erroneous Certificates.

Pownext may also alter EECS-GOs held in its EECS registry so as to rectify an error which occurred prior to its transfer into the Account in which it is held at such time, provided:

- the Account Holder has agreed to such alteration;
- it is reasonably satisfied that any unjust enrichment of a EECS Participant as a consequence of such error has, to the extent reasonably practicable, been nullified;
- it is reasonably satisfied that the alteration itself does not give rise to undue enrichment of the Account Holder.



EECS Domain Protocol

E.9.2. In case of international transfer failure, Pownext immediately reacts as soon as possible in order to correct the transfer and avoid any risk of double counting of GOs. The GO registry is checked every business day so that transfer failure issues are addressed quickly.

- When a transfer failed, Pownext first contacts (or is contacted by) the SuperUser of the AIB Hub. Pownext confirms whether the EECS-GOs are still in the French GO registry or if the EECS-GOs are already deleted from the Transferrable Account of the Account Holder.
 - In case the EECS-GOs are still in the French GO registry, then Pownext retry the transfer, after having corrected the potential technical errors.
 - In case the EECS-GOs are not in the French GO registry anymore, Pownext immediately contact the other registry to confirm the transfer.
- When an obvious error has occurred and is agreed between two registries, Pownext can modify the corresponding EECS-GO even if Pownext was not the Issuing Body for this EECS-GO.

E.10 End of Life of EECS Certificates – Cancellation

E.10.1. Cancellation is removing a Certificate from circulation. Once Cancelled, a Certificate cannot be moved to any other account, and so is no longer tradable.

E.10.2. The initiation of Cancellations is undergone by the relevant Account Holder in accordance with the following procedure:

- The Account Holder connects to its personal secure account on the Registry and goes to the “Cancellation” section.
- The Account Holder specifies the EECS-GO to be cancelled amongst the list EECS-GOs in one of its Transferable Accounts. This excludes withdrawn, expired or already cancelled EECS-GO. The Account Holder can specify as well the country of consumption (being mandatorily “France”, with the only exception of ex-domain cancellations), cancellation purpose, usage category (being mandatorily disclosure), name, type and location of beneficiary and related consumption period.

E.10.3. The cancellation of certificates is partly automated. When an Account Holder asks for the cancellation of EECS-GO, an automatic check is carried out. The completeness and adequacy of the information is then verified by the operational team of Pownext. If the data are not correct, the cancellation of the EECS-GO is abandoned. If the data are complete and accurate, the EECS-GOs are cancelled by Pownext. Cancelled certificates are removed from the Transferable Account of the Account Holder and cannot be cancelled or transferred anymore.

E.10.4. The confirmation of the success or failure of a cancellation is notified to the account holder by Pownext. In case of success, a document (cancellation statement) can be downloaded by the Account Holder through the registry by Pownext confirming the cancellation of the EECS-GO Certificates (see E.9.6 Forms). In case of rejection of a cancellation, the Account Holder is furthermore explicitly notified by Pownext about the rejection and the reasons for it.

E.10.5. Only EECS-GOs relating to renewable electricity and cogeneration may be cancelled in the Pownext registry.

E.10.6. A cancellation statement can be printed out from the registry by the Account Holder organisation that has performed the cancellation. A template is available in Annex 5.

E.10.7. Ex-domain cancellations are permitted for European countries where Registries do not have access to the AIB Hub and cannot import Certificates electronically.



EECS Domain Protocol

E.11 End of Life of EECS Certificates – Expiry

- E.11.1. EECS Certificates which have expired are no longer valid for cancellation nor transfer.
- E.11.2. In accordance with legal regulations, EECS-GOs expire one year after the end of the respective production period.
- E.11.3. EECS Certificates expire automatically after the legal expiry date.
- E.11.4. Imports of certificates that have already expired are prevented.

E.12 End of Life of EECS Certificates – Withdrawal

- E.12.1. Pownext may withdraw an EECS-GO held in a Transfer Account on its EECS registry at the request of the Account Holder of that Account, or otherwise in accordance with the provisions of the relevant Product Rules, thereby withdrawing it. Withdrawal of Certificates can occur following errors as described on E.9.
- E.12.2. Pownext may withdraw an EECS Certificate held in its EECS Registration Database to give effect to an agreement reached with an EECS Market Participant under provisions of its Standard Terms and Conditions.
- E.12.3. When Pownext withdraws an EECS-GO, it no longer appears on the Account Holder account and it is no longer transferable nor eligible to be cancelled.

F Activity Reporting

F.1 Public Reports

F.1.1. Pownext publishes on a monthly basis the list of EECS GOs which have been issued and cancelled on the registry. Data are available on pownext website: <http://www.pownext.com> and follows the French legislation requirements. Data includes: the ID Number of the GO, date of delivery, name of the account holder having issued the Certificate, Legal form of the Account Holder, Production Device Name, Production Device Location, Production Device installed capacity, Production Device commissioning date, Energy Source, National support type, amount and duration of national support, production start date, production end date, quantity certified, cancellation date.

F.2 Record Retention

F.2.1. Retention of printed and electronic information regarding registries and data is done in accordance with the following table:

Data	Time	Medium
Standard terms and conditions and its appendices	Minimum 5 years (paper) and 10 years (scans) after termination of contract	Both paper and electronic archive (scans)
Production Device Registration forms, audit reports	Minimum 10 years after de-registration	Electronic forms
Issuing Request (Consumption Declaration / Production Declarations)	Minimum 10 years	Electronic forms
Transaction data	Minimum 10 years	Database backups

F.3 Orderly Market Reporting

F.3.1. When appropriate, Pownext will report failures by EECS Market Participants to comply with the provisions of Product Rules to the Competent Authorities. Such failures include behaviour by EECS Market Participants of which Pownext is aware and which, in its reasonable opinion, amounts to a breach of Competition Law, or applicable law governing the conduct of financial markets.

F.3.2. When appropriate, Pownext will notify the AIB of any report made by it under Section F.3.1 and will provide the AIB with as much information in relation to such report as is consistent with any duty of confidentiality it may have to the relevant EECS Market Participant(s).



G Association of Issuing Bodies

G.1 Membership

G.1.1. Powernext considers AIB membership as a paramount point to remove possible barriers that might impair GO's' imports and exports.

G.1.2. In the case Powernext would be replaced by other Issuing Body for the French domain by a new Decree, AIB would be informed immediately. In this situation, Powernext would take the necessary actions to guarantee a right transition to the new Issuing Body.

G.2 Complaints to the AIB

G.2.1. Account Holders can send complaints and questions by email to GO-support@powernext.com. For complaints related to AIB, Powernext will be the liaison and will respond back to the participant.

H Change Control

H.1 Complaints to Powernext

Powernext endeavour to deal with complaints received as soon as possible. Complaints can be filed by email, phone call confirmed by email or registered letter. They should be addressed to the relevant contact listed in Annex 1, according to whether the complaint concerns general, operational or administrative issues.

Powernext will answer within five (5) working days after receipt of such complaint, informing the customer of the applicable procedures. Powernext strives to resolve all complaints within one (1) month. Where for whatever reason this proves impossible, Powernext will inform the customer of the reason for the delay and keep them informed on further progress. Upon resolution of a complaint, Powernext will send written confirmation of the outcome.

H.2 Disputes

All disputes arising out of or in connection with the validity, interpretation, performance, non-performance or termination of the Standard Terms and Conditions shall be submitted to mediation according to the CMAP's¹ Rules of Mediation and, in the event that no settlement is thereby reached, to arbitration according to the CMAP's Rules of Arbitration, to which the parties undertake to adhere.

H.3 Change Requests

An Account Holder may propose a modification to this Domain Protocol.

Such a proposal will include a detailed description, including an exact specification of any proposed modification of this Domain Protocol and be passed in writing to Powernext.

On receipt of such a request, Powernext will:

¹Centre for Mediation and Arbitration of Paris, Paris Chamber of Commerce and Industry - 39, avenue Franklin D. Roosevelt, 75008 Paris



EECS Domain Protocol

- respond to the request, describing the procedures to be followed, and estimating when a reply can be expected;
- consult with the other EECS Account Holders within France that might be affected by such a modification;
- decide whether the request and its consequences are in its opinion reasonable;
- inform the EECS Account Holders within France on the outcome of its decision.

Powernext may make such modifications to this Domain Protocol as are in its opinion necessary to the effective and efficient operation of the market.

Subject to applicable law, any modifications to this Domain Protocol are subject to approval by the AIB that such changes do not conflict with the EECS Rules.

Implementation of modifications will be notified by email to the Account Holder and will take effect on publication of the documentation on the website of Powernext (www.powernext.com).



Annex 1: Contacts List

Authorised Issuing Body/Registry Operator

For any general questions, please contact:

Company	Powernext
Contact Person	Aude FILIPPI
Address	5 boulevard Montmartre – 75002 PARIS
Country	France
Phone	+33 1 73 03 76 87
e-mail	GO-info@powernext.com

For questions regarding the admission of an Account Holder, please contact:

Company	Powernext
Contact Persons	Alexandra PHILIPPE / Olatz GARCIA
Address	5 boulevard Montmartre – 75002 PARIS
Country	France
Phone	+33 1 73 03 76 88 / + 33 1 73 03 76 70
e-mail	GO-admission@powernext.com

For operational questions, please contact:

Company	Powernext
Address	5 boulevard Montmartre – 75002 PARIS
Country	France
Phone	+33 1 73 03 96 28
e-mail	GO-support@powernext.com

If the operational question asked need to involve Measurement Bodies, Powernext will contact them. Here is the list of Measurement Bodies in France:

- RTE (Réseau de Transport d'Electricité)
- ERDF (Electricité Réseau Distribution de France)
- List of Local Distribution Companies (Entreprises locales de distribution en France – ELD) available on the following website : <http://www.repertoire-eld.com/accueil.asp>




EECS Domain Protocol

Annex 2: Account Application/Amendment Form

The Account Application Form can be found on the Powernext website: www.powernext.com

Annex 3: Device Registration Form

This form is available under electronic form. Production Devices must be registered on the registry website. The Account Holder needs to connect to its personal secure account on the Registry.


Se connecter en tant que login [Se déconnecter](#)

[FR](#) | [EN](#) | [NO](#)

Titulaire
Installations de production
Garanties d'origine
Journal des modifications

Accueil >> [Installations de production](#) >> [Ajouter une installation](#)

[Tableau des installations](#)

[Ajouter une installation](#)

Informations générales

Nom

Gestionnaire de réseau

Adresse

Adresse (2)

Code postal Ville

Pays

Informations techniques

Type d'installation

Source(s)

Puissance (MVV)

Date de mise en service Date de début de mandat

Référence du contrat d'accès au réseau Référence du récépissé de l'autorisation d'exploiter

Etes-vous le titulaire du contrat d'accès au réseau ?

Informations sur le titulaire du contrat d'accès au réseau

Raison sociale

Adresse

Adresse (2)

Code postal Ville

Pays

Informations additionnelles

Aide(s) nationale(s)

Commentaire

Bénéficie d'un contrat d'obligation d'achat ? Référence du contrat d'achat

Label(s)	Début du label	Fin du label
<input type="checkbox"/>	<input type="text"/>	<input type="text"/>
<input type="checkbox"/>	<input type="text"/>	<input type="text"/>

L'installation dispose-t-elle d'auxiliaires ? Non Oui

Référence du compteur de production

Référence des compteurs auxiliaires

Document à faire parvenir

Merci d'envoyer par mail à GO-support@powernext.com les documents suivants :


- Copie du contrat d'accès au réseau ou du contrat de service de décompte. Celui-ci contient un schéma électrique de l'installation avec localisation des compteurs d'exportation, des compteurs d'importation, des auxiliaires de production et des postes de transformation et de tous les groupes de production.
- Copie du récépissé de la déclaration ou de l'autorisation d'exploiter délivrés en application du décret du 7 septembre 2000.
- Copie du contrat d'achat si la demande de garantie d'origine est présentée par un acheteur d'électricité ayant conclu un contrat d'achat régi par les dispositions des articles L. 121-27, L. 311-12 et L. 314-1 du code de l'énergie.
- Si le propriétaire de l'installation de production n'est pas le demandeur de garantie d'origine, un mandat liant le producteur et le demandeur et un extrait de K-bis de la société du propriétaire.

Je certifie que les informations contenues dans ce formulaire sont exactes et je me conforme en tout point au Protocole de Domaine de Powernext.

Annex 4: Production/Consumption Declaration

This form is available under electronic form. The Account Holder needs to connect to its personal secure account on the Registry. EECS-GOs are issued according to data filled in the electronic version of the registry. In case of EECS-GOs from a cogeneration production device, the Account Holder needs to add the Excel file “CHP-GO model” to its online demand.

- Standard Case

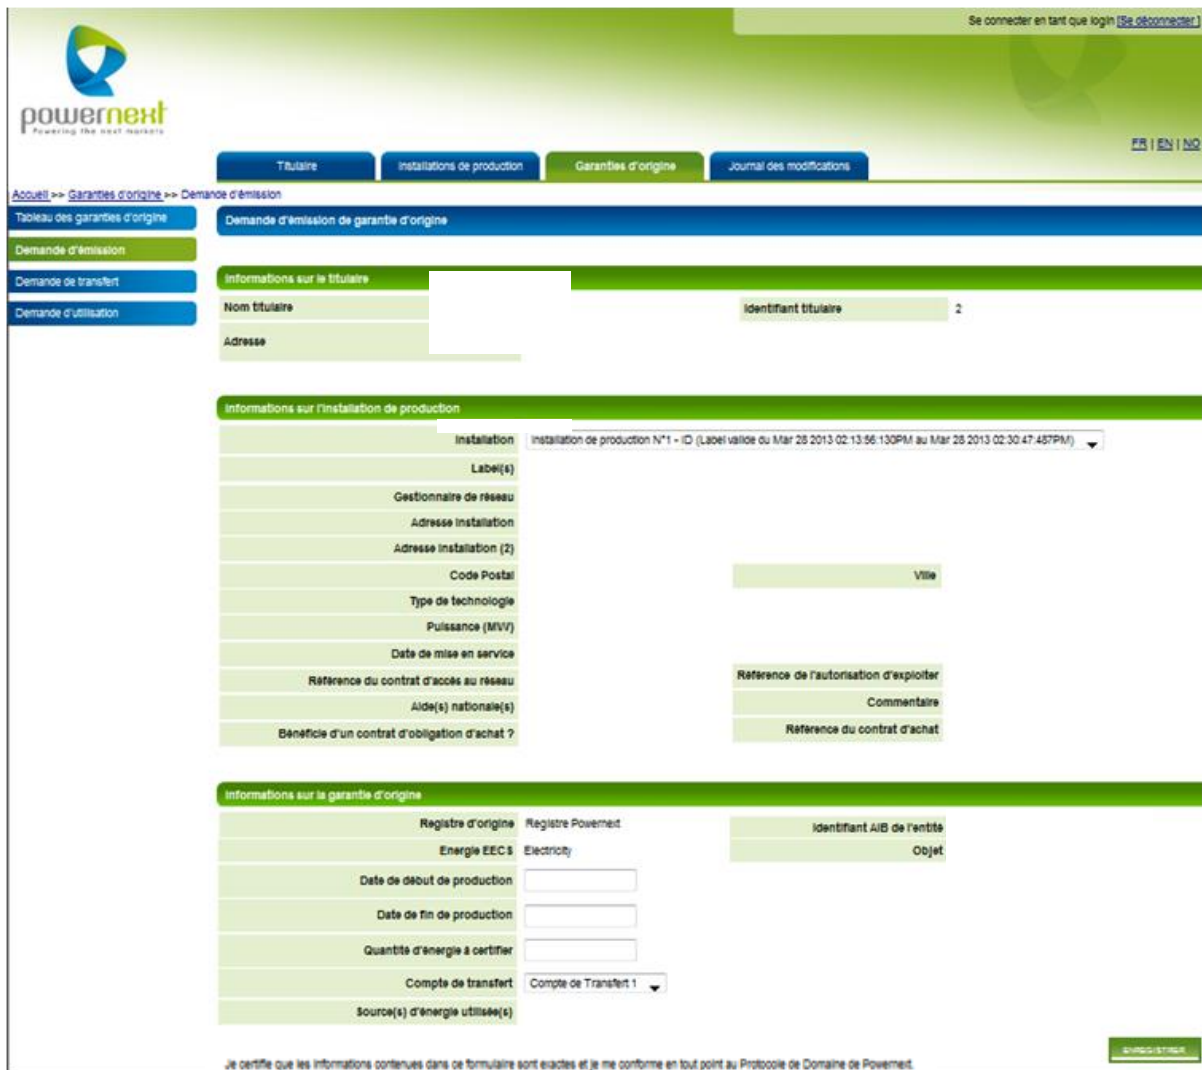

The screenshot displays the 'Demande d'émission de garantie d'origine' form within the Powernext web interface. The form is organized into several sections:

- Informations sur le titulaire:** Includes fields for 'Nom titulaire', 'Adresse', and 'Identifiant titulaire' (value: 2).
- Informations sur l'installation de production:** Includes a dropdown for 'Installation' (selected: 'Installation de production N°1 - ID (Label valide du Mar 28 2013 02:13:56:130PM au Mar 28 2013 02:30:47:487PM)'), 'Label(s)', 'Gestionnaire de réseau', 'Adresse installation', 'Adresse installation (2)', 'Code Postal', 'Ville', 'Type de technologie', 'Puissance (MW)', 'Date de mise en service', 'Référence du contrat d'accès au réseau', 'Référence de l'autorisation d'exploiter', 'Aide(s) nationale(s)', 'Commentaire', and 'Bénéficie d'un contrat d'obligation d'achat ?'.
- Informations sur la garantie d'origine:** Includes 'Registre d'origine' (selected: 'Registre Powernext'), 'Energie EECS' (selected: 'Electricity'), 'Identifiant AIB de l'entité', 'Objet', 'Date de début de production', 'Date de fin de production', 'Quantité d'énergie à certifier', 'Compte de transfert' (selected: 'Compte de Transfert 1'), and 'Source(s) d'énergie utilisée(s)'. A green 'D'ÉMISSION' button is located at the bottom right of this section.

At the bottom of the form, there is a certification statement: 'Je certifie que les informations contenues dans ce formulaire sont exactes et je me conforme en tout point au Protocole de Domaine de Powernext.'

Annex 5: Cancellation Statement



Attestation d'utilisation - Garantie d'Origine Cancellation Statement – Guarantee of Origin

Ce document atteste que les garanties d'origine listées ci-dessous ont été utilisées au sein de Powernext, Registre National Français des Garanties d'Origine. Les garanties d'origine indiquées ne sont plus négociables ou utilisables. Toute vente ultérieure ou utilisation ultérieure de cette attestation d'utilisation est interdite. Toute duplication ou amendement de cette attestation est interdite.

This document certifies that the guarantees of origin listed hereunder have been cancelled through Powernext as the French Registry for Guarantees of Origin. These guarantees of origin are not transferable or cancelable anymore. Any later sale or cancellation of this cancellation statement is forbidden. It is forbidden to copy or amend this cancellation statement as well.

Informations générales / General information

Titulaire du compte <i>Account Holder</i>	
Adresse du titulaire <i>Account Holder address</i>	
N° de demande <i>Cancellation number</i>	
Date d'utilisation <i>Date of cancellation</i>	
Quantité d'énergie utilisée (MWh) <i>Amount of energy cancelled (MWh)</i>	
Objet de l'utilisation <i>Purpose of cancellation</i>	
Pays d'utilisation <i>Country of cancellation</i>	
Type de bénéficiaire <i>Type of beneficiary</i>	
Bénéficiaire <i>Beneficiary</i>	
Période d'utilisation <i>Cancellation period</i>	Du / From [JJ/MM/AAAA] Au / To [JJ/MM/AAAA]



EECS Domain Protocol

Garanties d'origine utilisées / Cancelled guarantees of origin

#	N° de garantie d'origine N° of guarantee of origin	Quantité d'énergie (MWh) Amount of energy (MWh)	Date d'émission Issuance date	Période de production Production period	Label(s) Label
1	64300240655900000000000000000000XX 64300240655900000000000000000000XX			-	

Informations sur l'(es) installation(s) de production / Information on Production Device(s)

#	N° de l'installation N° of Production Device	Nom de l'installation Production device name	Domaine Location	Technologie Technology	Source Source	Puissance (MW) Capacity (MW)	Date de mise en service Date operational	Aide Support
1	64300240662600XXXX			T030000	F01050200			0



EECS Domain Protocol

Annex 6: Definitions

Terms used in capitalized letters shall have the meaning provided in the EECS rules of the Association of Issuing Bodies (AIB), the latest version of which can be found at <http://www.aib-net.org>. For information only, some of the definition of the main terms is provided hereby. Would there be any conflicts between the latest version of the EECS rules and the definitions provided hereby, the latest EECS rules version shall prevail.

TERM	MEANING
Association of Issuing Bodies or "AIB"	The international scientific association constituted in accordance with the Belgian law of 25 October 1919 (as amended) under the name of "Association of Issuing Bodies" with a company number of 0.864.645.330
Domain	An area containing Production Devices with respect to which a Member is an Authorised Issuing Body for the purposes of an EECS Product
EECS	European Energy Certificate System : a commercially funded, integrated European framework for issuing, holding, transferring and otherwise processing electronic records (EECS Certificates) certifying, in relation to specific quantities of output from production devices, attributes of its source and/or the method and quality of its production.
EECS Certificate	A unique electronic Certificate specifying and representing the quality and method of production of a specific quantity of Output, which is maintained on a EECS Registration Database and Issued in accordance with the provisions of the EECS Rules
EECS-GO	An EECS Certificate corresponding to a type of Guarantee of Origin ("GO");
EECS Registration Database	A database operated by a Member, or operated by a Registry Operator on behalf of a Member, for the purposes of EECS, comprising: <ul style="list-style-type: none"> (a) Transferables and Cancellation Accounts and the EECS Certificates in those Accounts; (b) details of Production Devices and information provided to the Member or its Registry Operator in connection with the registration of those Production Devices with that Member or Registry Operator; and (c) details of EECS Certificates which have been transferred out of that EECS Registration Database;
EECS Rules	Principles and rules of operation of the European Energy Certificate System.



EECS Domain Protocol

EECS Scheme	Arrangements established by a Section of PART IV of the EECS Rules for the acceptance of Products in relation to a type of Output into EECS;
Guarantee of Origin (or "GO")	An electronic document (Certificate) issued by a Competent Authority under the laws of a State as a guarantee of the nature and origin of energy for the purpose of providing proof to a final customer that a given share or quantity of energy, as the case may be : (i) was produced from the energy source to which the guarantee relates; (ii) was produced by the specified technology type to which the guarantee relates; and/or (iii) has, or the Production Device(s) which produced it has (or have) other attributes to which the guarantee relates;
Output	An amount of energy or material goods yielded by a Production Device and measured by a Measurement Body, being either (i) electricity (ii) fuel; or (iii) heat
Production Device	A separately measured device or group of devices that produces an Output
Registrant	A person in whose name a Production Device is registered from time to time in an EECS Registration Database for the purposes of the Issue of one or more EECS Products
Registry Operator	In relation to any Member and EECS Scheme either: (a) that Scheme Member; or (b) where such appointment has been made, the person appointed by such Scheme Member to administer the operation of the EECS Registration Database for the purposes of that EECS Scheme;

The following is a summary of the EECS Rules Fact Sheet 'Types of Energy Inputs and Technologies' entries for technologies. Would there be any conflicts between the latest version of this Fact Sheet and the tables provided below, the latest version of the Fact Sheet shall prevail.

Energy Inputs			
Level 1	Level 2	Level 3	
Solid	Unspecified	Unspecified	
	Municipal waste	Biogenic	
	Industrial and commercial waste	Biogenic	
	Wood	Unspecified	
		Forestry products	
		Forestry by-products & waste	
	Animal fats	Unspecified	
	Biomass from agriculture	Unspecified	
		Agricultural products	
		Agricultural by-products & waste	
Liquid	Unspecified	Unspecified	
	Municipal biodegradable waste	Unspecified	
	Black liquor	Unspecified	
	Pure plant oil	Unspecified	
		Rapeseed (Brassica napus L.)	
		Sunflower (Helianthus annuus L.)	
		Oil palm (Elaeis guineensis Jacq.)	
		Coconut (Cocos nucifera L.)	
		Yatropha	
		Waste plant oil	Unspecified
	Refined vegetable oil	Unspecified	
		Biodiesel (mono-alkyl ester)	
		Biogasoline (C ₆ -C ₁₂ hydrocarbon)	
		Unspecified	
	Gaseous	Unspecified	Unspecified
		Landfill gas	Unspecified
		Sewage gas	Unspecified
Agricultural gas		Unspecified	
		Pig manure	
		Cow manure	
		Chicken manure	
		Unspecified manure	
		Energy crops	
Gas from organic waste digestion		Unspecified	
Process gas		Biogenic	
Heat	Solar	Unspecified	
	Geothermal	Unspecified	
		Conventional geothermal heat	
		Enhanced dry bed geothermal heat	
	Aerothermal	Unspecified	
	Hydrothermal	Unspecified	
	Process heat	Biogenic	
Mechanical source or other	Unspecified	Unspecified	
	Wind	Unspecified	
	Hydro & marine	Unspecified	

Technologies			
Level 1	Level 2	Level 3	
Solar	Unspecified	Unspecified	
	Photovoltaic	Unspecified	
		Classic silicon	
		Thin film	
Concentration	Unspecified		
Wind	Unspecified	Unspecified	
		Onshore	
		Offshore	
Hydro-electric Head	Unspecified	Unspecified	
	Run-of-river head installation	Unspecified	
	Storage head installation	Unspecified	
	Pure pumped storage head installation	Unspecified	
	Mixed pumped storage head	Unspecified	
Marine	Unspecified	Unspecified	
		Tidal	Unspecified
		Onshore	
	Offshore		
	Wave	Unspecified	Unspecified
		Onshore	
		Offshore	
	Currents	Unspecified	
Pressure	Unspecified		
Thermal	Unspecified	Unspecified	
	Combined cycle gas turbine with heat recovery	Unspecified	
		Non CHP	CHP
	Steam turbine with back-pressure turbine (open cycle)	Unspecified	
		Non CHP	CHP
	Steam turbine with condensation turbine (closed cycle)	Unspecified	
		Non CHP	CHP
	Gas turbine with heat recovery	Unspecified	
		Non CHP	CHP
	Internal combustion engine	Unspecified	Unspecified
		Non CHP	
		CHP	
	Micro-turbine	Unspecified	Unspecified
		Non CHP	
CHP			
Stirling engine	Unspecified	Unspecified	
	Non CHP	CHP	
Fuel cell	Unspecified	Unspecified	
	Non CHP		
	CHP		
Steam engine	Unspecified	Unspecified	
	Non CHP		
	CHP		
Organic rankine cycle	Unspecified	Unspecified	
	Non CHP		
	CHP		
Nuclear	Unspecified	Unspecified	
	Heavy-water reactor	Unspecified	
	Light water reactor	Unspecified	
	Breeder	Unspecified	
	Graphite reactor	Unspecified	
Other	Unspecified	Unspecified	